

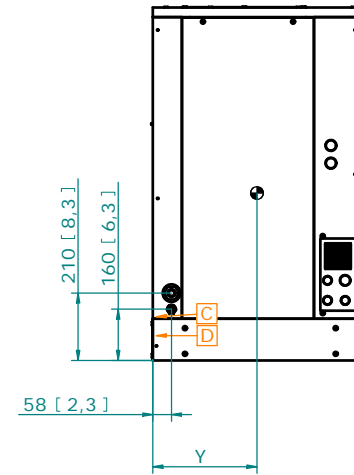


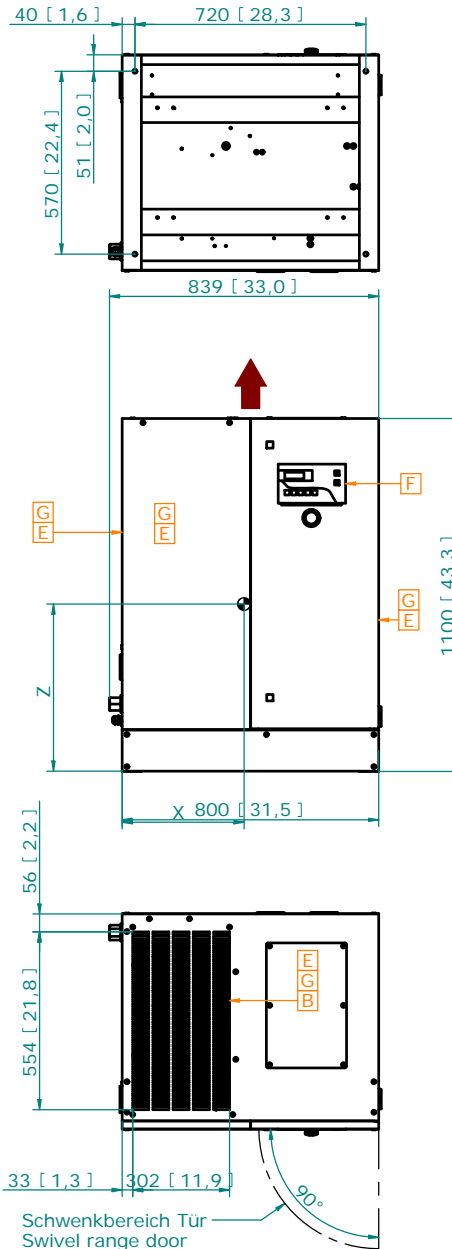

Bemaßung  
Dimensioning mm (inch) C G 3/4" (NPT 3/4" - 14)

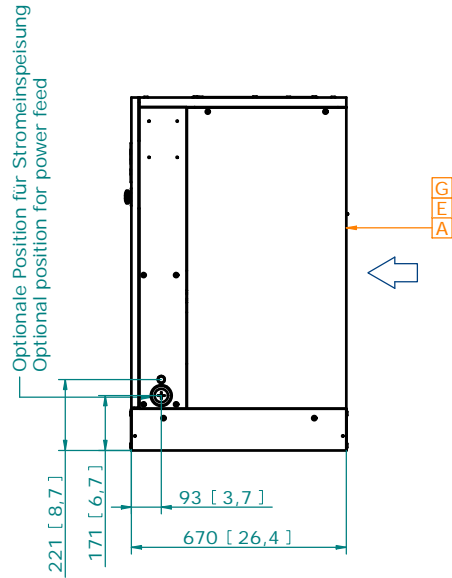

**A) Kühlluft eintritt**  
Cooling air inlet  
Ingresso aria raffreddamento  
Entrée d'air de refroidissement  
Entrada de aire de refrigeración

**B) Kühlluft austritt**  
Compressor cooling air outlet  
Uscita aria raffreddamento compressore  
Sortie d'air de refroidissement du compresseur  
Salida de aire de refrigeración del compresor

**C) Druckluftanschluss**  
Compressed air connection  
Raccordo aria compressa  
Raccordement d'air comprimé  
Conexión de aire comprimido

**D) Netzanschluss**  
Power alimination  
Alimentazione elettrica  
Alimentation électrique  
Alimentación de potencia

**E) Wartungsseite**  
Service side  
Lato manutenzione  
Côté maintenance  
Lado de servicio

**F) Bedienfeld**  
Operation panel  
Pannello di comando  
Panneau de commande  
Panel de mando

**G) Mindestabstand zur Wand: 500 mm**  
Min. wall clearance 500 mm  
Distanza min. da parete 500 mm  
Distance min. au mur 500 mm  
Distancia a la pared mín. 500 mm

### Schwerpunkt / Centre of gravity

Typ / Type	X	Y	Z
BELT XP 8			
BELT XP 11			
BELT XP 15			

### Gewicht / Weight

Typ / Type	Luftgekühlt / aircooled
BELT XP 8	274,5 kg (605,2 lbs)
BELT XP 11	284,5 kg (627,2 lbs)
BELT XP 15	370 kg (815,7 lbs)